

VW GOLF V - 3, 5 porte modello 2004  
VW GOLF VI - 3, 5 porte modello 2008

**MOCSKT 0015**



**MOCSRR0AC0011 cm 124**

**MOCSRR0AL0007 cm 124**


|                                                                        |  |                                                                        |           |                                          |  |
|------------------------------------------------------------------------|--|------------------------------------------------------------------------|-----------|------------------------------------------|--|
| 1 - L1070/1<br>1 - L1070/2<br>2 - L1070/3                              |  | 4 - RC1500/35<br>8 - RCVM6X9Q<br>2 - RCVM6X12Q                         | <br>12 mm | 4 - RC20200026<br>1 - RCBR5<br>1 - RCBR4 |  |
| I-montare le guarnizioni<br>GB-fit the gaskets<br>E- montar las juntas |  | I-montare gli attacchi<br>GB-fit the clamps<br>E- ajustar las pletinas |           |                                          |  |
|                                                                        |  |                                                                        |           |                                          |  |

!!!




**MOCSRR0AC0011 cm 124**

**MOCSRR0AL0007 cm 124**

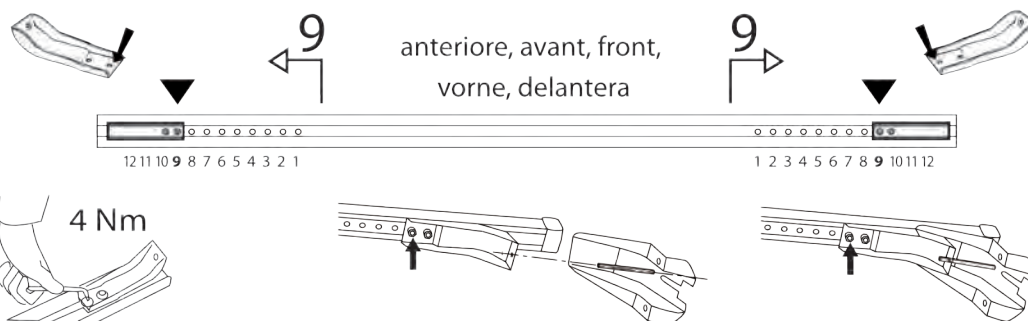

I-montare la barra anteriore  
GB- fit the front bar  
E- ajustar la barra frontal

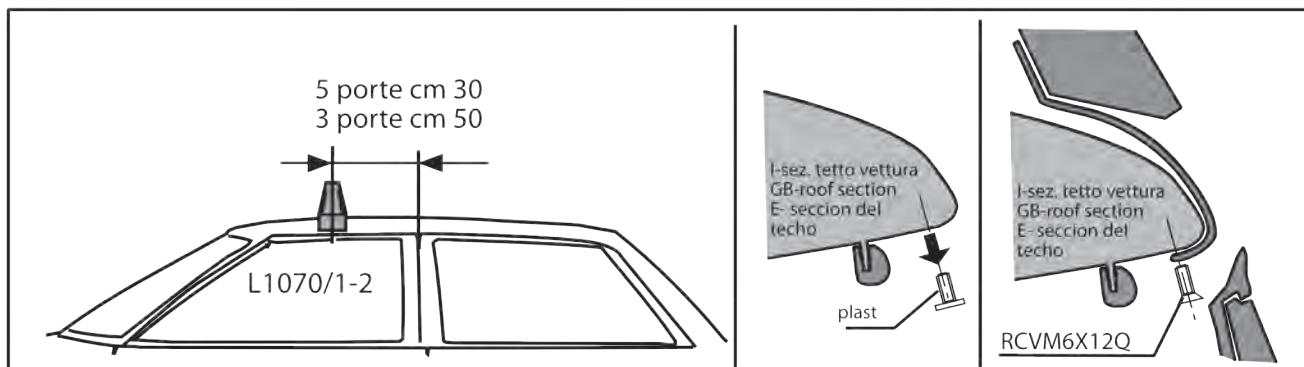






**MOCSRR0AC0011 cm 124**  
**MOCSRR0AL0007 cm 124**





posteriore, arriere,  
rear, hinten, trasera




4 Nm

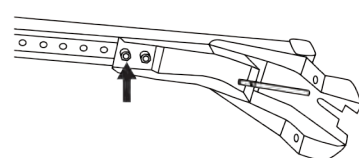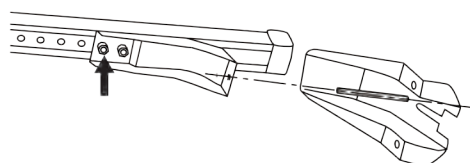

I-montare la barra posteriore  
 GB-fit the rear bar  
 E- ajustar la barra trasera

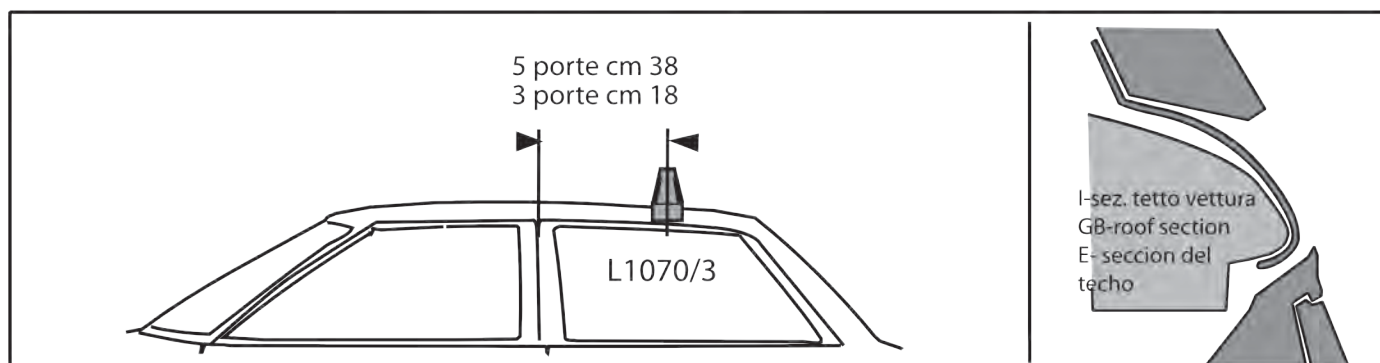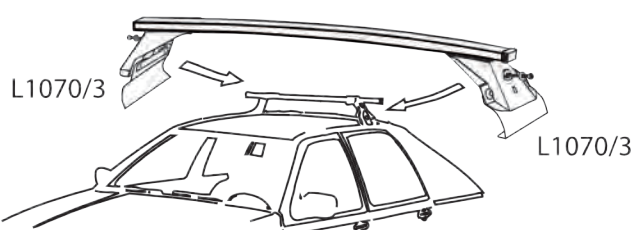

I - Per stringere, usare la chiave come indicato nel disegno. (Non si assumono responsabilità per danni causati dall'impiego di chiavi diverse da quella in dotazione al prodotto).  
 F - Pour serrer, utiliser la clé comme indique ci dessous.  
 GB - To tighten please use the wrench as per the drawing.  
 D - Zum Anziehen benutzen Sie bitte den Inbusschlüssel, nur wie auf dem Bild dargestellt.  
 E - Para el correcto ajuste, utilizar la llave fija tal y como se indica en la imagen



max 4 Nm

